
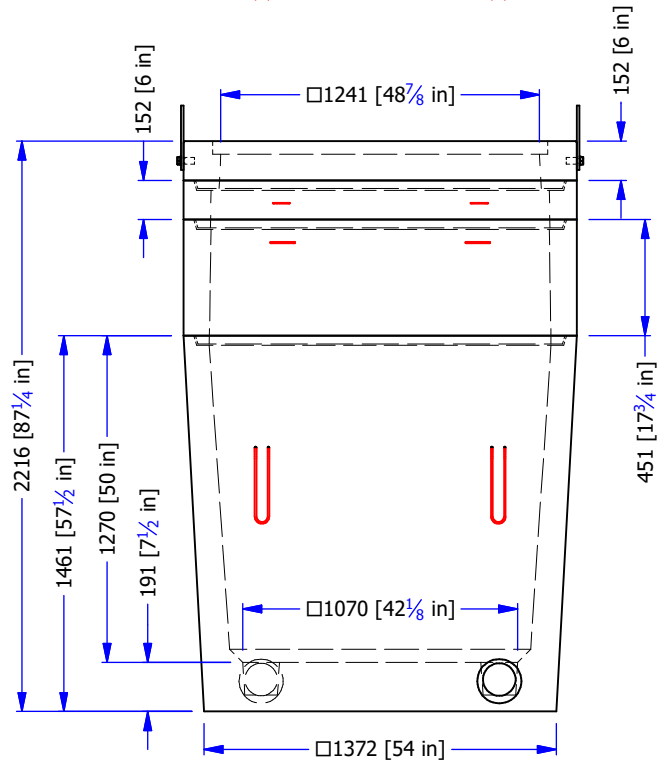
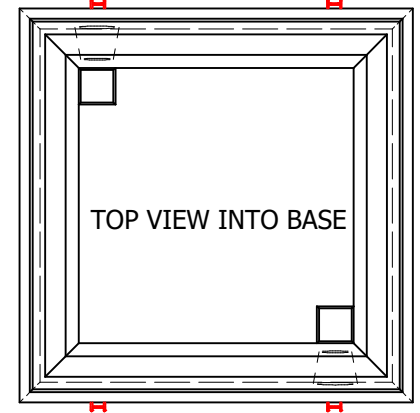
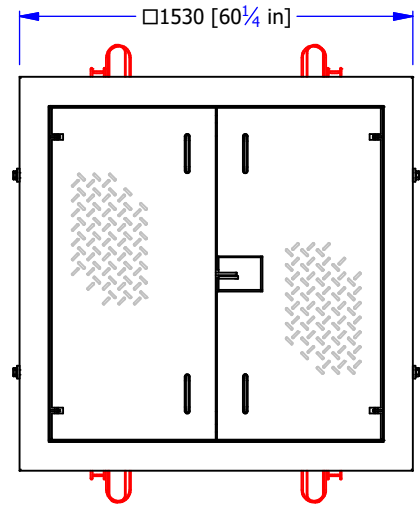


#	PART #	DESCRIPTION	ITEM #	KG
1	1.5M SV	1.5M SERVICE VAULT		2509
2	1.5M R450	1.5M RISER 450 [18"]	42132	611
3	1.5M R150	1.5M RISER 150 [6"]	42131	206
4	1.5M HC	1.5M HATCH COLLAR	42127	323
5	1.5M KIT PL	1.5M HATCH LID KIT RECESSED PADLOCK	12427	129

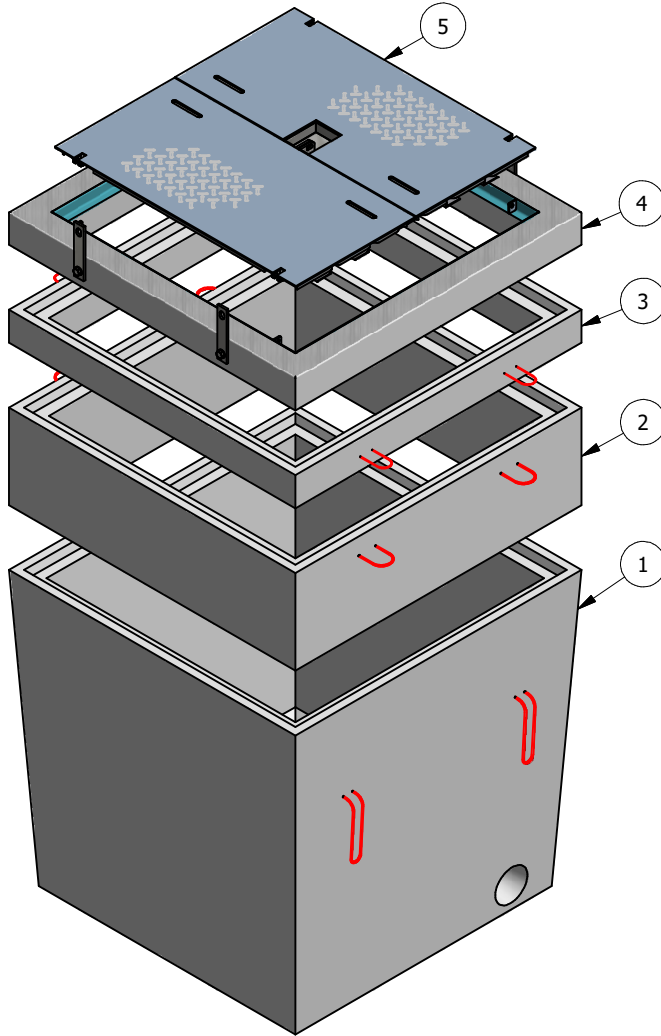

- PRODUCT MANUFACTURED IN ACCORDANCE WITH CSA A23.4
- STEEL PRODUCTS MANUFACTURED UNDER CSA W47.1
- IN ACCORDANCE WITH CSA W59
- MIN CONCRETE STRENGTH AT 28 DAYS: 35 MPA
- GRADE 400 REBAR REINFORCEMENT
- DESIGNED FOR BCL625 H20 OCCASIONAL LOADING

WWW.FRASERWAYPREKAST.COM

(604) 534-2911



1.5M SERVICE VAULT w/ 450 [18"] RISER 150 [6"] RISER, HATCH COLLAR & RECESSED PADLOCK HATCH LID

SIZE
A

DRAWING #

1.5M SV R450 R150 HC PL

REV

SHEET
1/1