



LIFTING PLATES
& HARDWARE
PROVIDED

300 kg

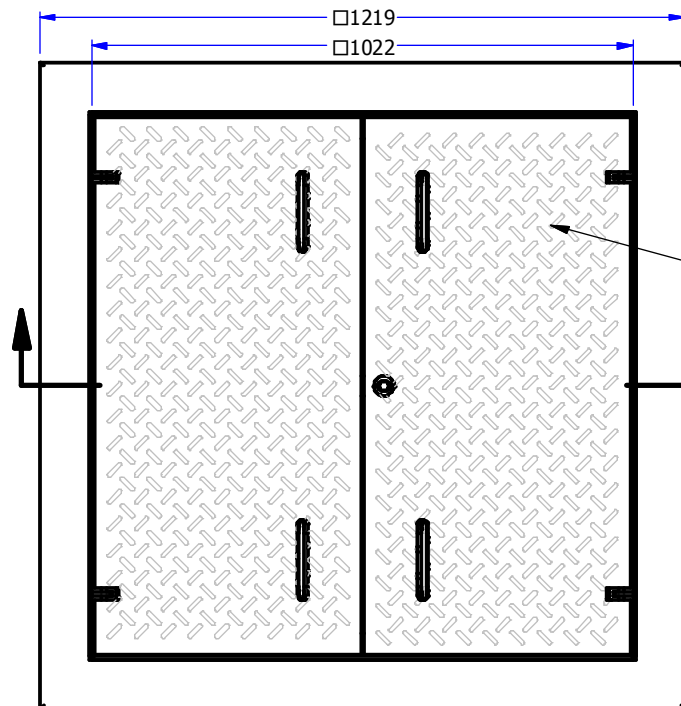

- AVAILABLE LID OPTIONS:**
- GALVANIZED STEEL (SHOWN)
 - RECESSED PADLOCK
 - BOLTDOWN (SHOWN)
 - PAINTED STEEL
 - REMOTE READER HOLES
 - WELD MARKINGS (E.G. "ELEC")

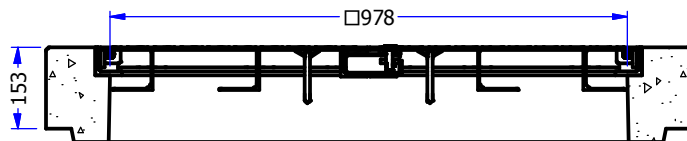

SECTION VIEW

NOTES

- PRODUCT MANUFACTURED IN ACCORDANCE WITH CSA A23.4
- STEEL PRODUCTS MANUFACTURED UNDER CSA W47.1 IN ACCORDANCE WITH CSA W59
- MIN CONCRETE STRENGTH AT 28 DAYS: 35 MPA
- GRADE 400 REBAR REINFORCEMENT
- DESIGNED FOR BCL625 H20 OCCASIONAL LOADING
- HARD STEEL FINISH



WWW.FRASERWAYPRECAST.COM

604-534-2911

1.2M HATCH LID BOLTDOWN

SIZE	DRAWING #	16523	REV	SHEET
A	1.2M HL BD			1/1