


671 kg

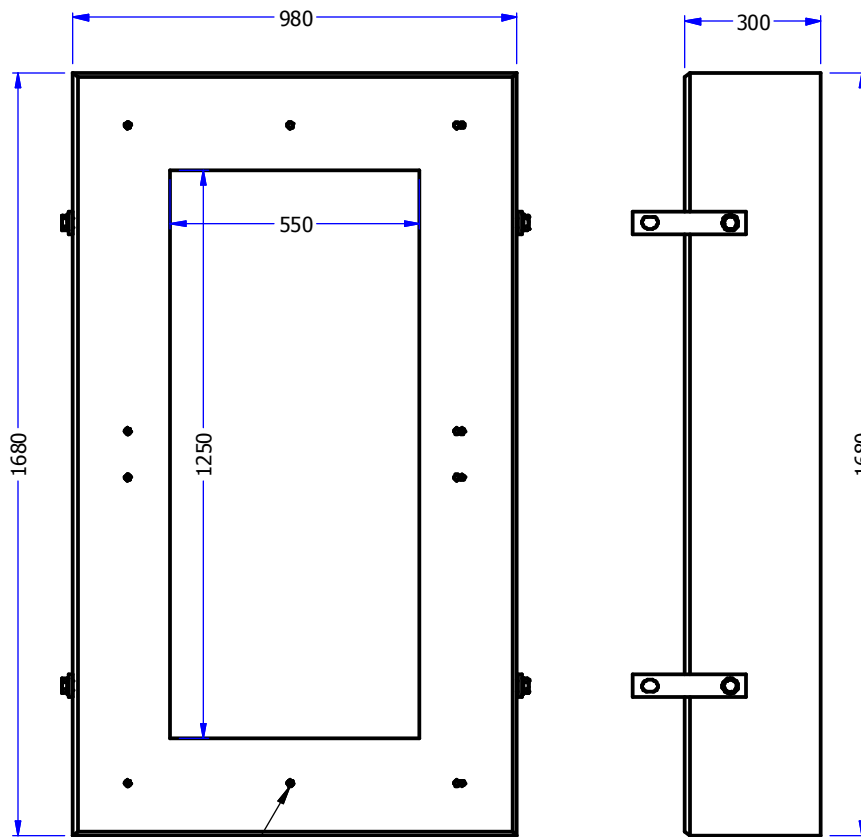

THREADED INSERT (10x)

NOTES

- PRODUCT MANUFACTURED IN ACCORDANCE WITH CSA A23.4
- MINIMUM CONCRETE STRENGTH AT 28 DAYS: 32 MPA
- GRADE 400 REBAR
- STEEL TROWEL FINISH



WWW.FRASERWAYPRECAST.COM

604-534-2911

SHAW 6060 PEDESTAL PAD
1680 x 980 x 300

SIZE	DRAWING #	15234	REV	SHEET
A	6060 PAD			1/1