
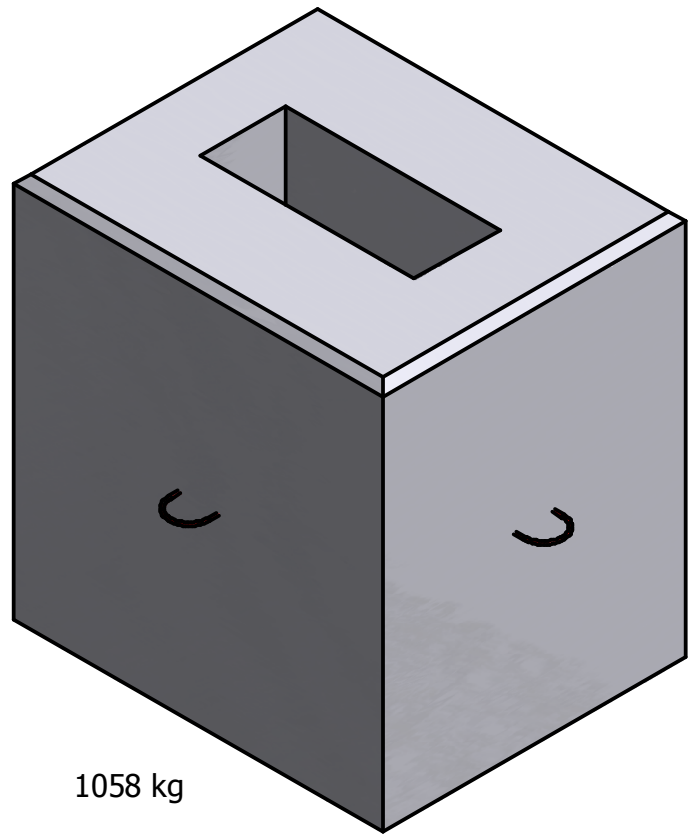


WIRE ROPE  
LIFTING  
LOOPS  
1600lbs  
(4x)

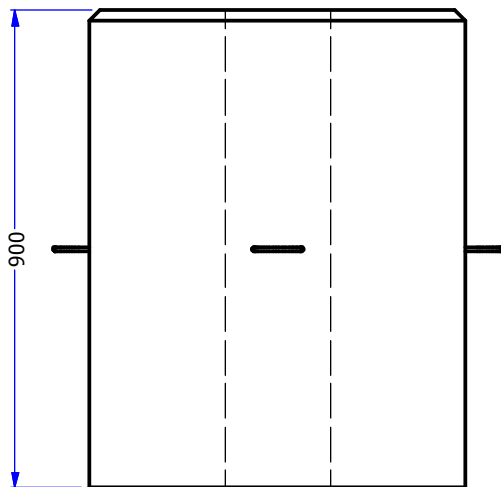

1058 kg

- PRODUCT MANUFACTURED IN ACCORDANCE WITH CSA A23.4
- MINIMUM CONCRETE STRENGTH AT 28 DAYS: 30 MPA
- MAXIMUM WATER-CEMENT RATIO OF 0.45 & AIR CONTENT OF 5-7%
- EXPOSURE CLASS F2/C4
- HARD STEEL FINISH
- PER MMCD DRAWING E1.3

**FRASERWAY PRECAST LTD**

WWW.FRASERWAYPRECAST.COM

604-534-2911

**MMCD TYPE '170' CONTROLLER  
BASE**

|      |           |       |     |       |
|------|-----------|-------|-----|-------|
| SIZE | DRAWING # | 15225 | REV | SHEET |
| A    | MMCD 170  |       |     | 1 / 1 |