



AVAILABLE LID OPTIONS:
 BLVD (OFF ROAD)-GALV BOLTDOWN (SHOWN)
 BLVD (OFF ROAD)-GALV W/ PADLOCK RECESS
 BLVD (OFF ROAD) PAINTED BOLTDOWN
 REMOTE READER HOLES,
 WELD MARKINGS (E.G. "ELEC", "COMM")

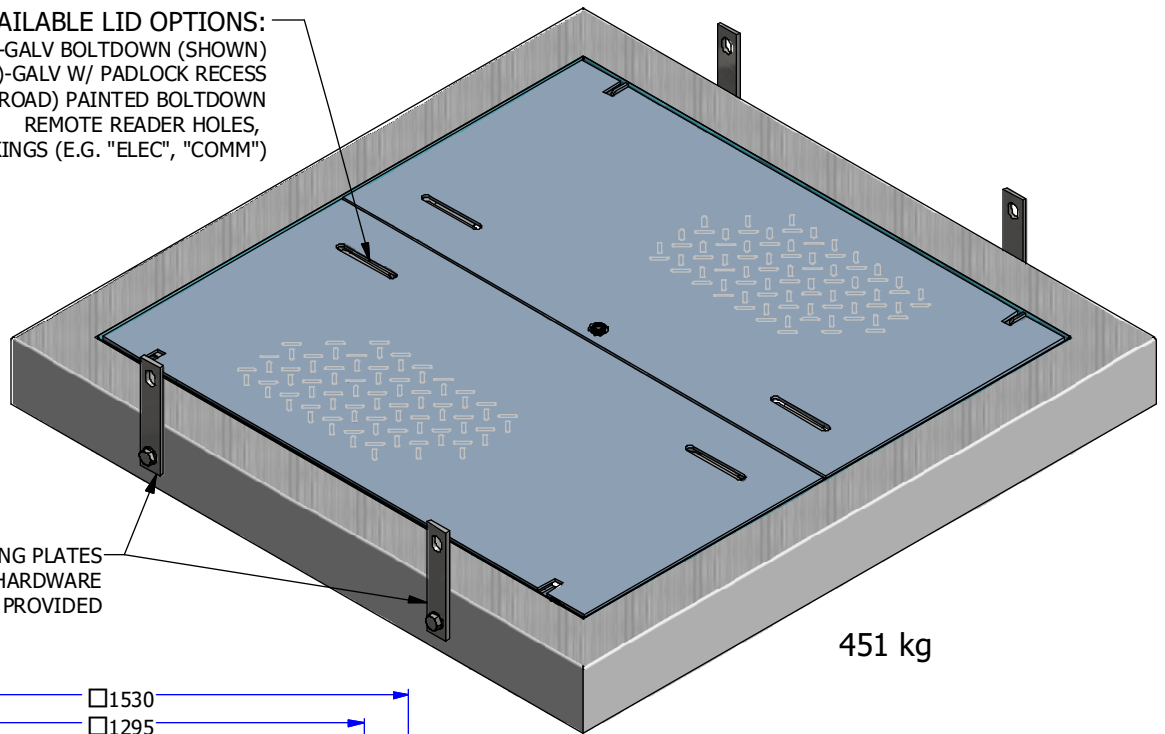

LIFTING PLATES
 & HARDWARE
 PROVIDED

451 kg

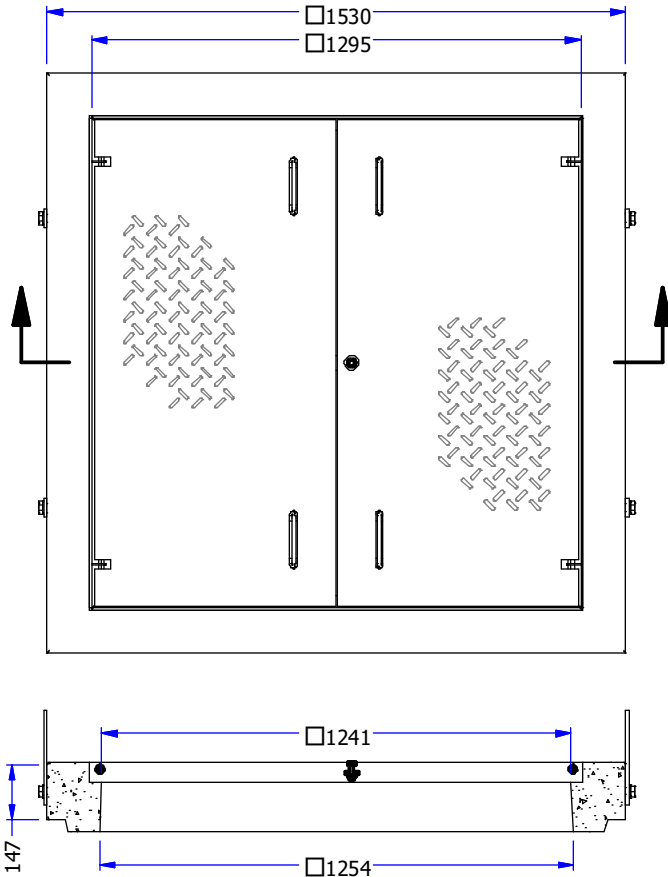

NOTES

- PRODUCT MANUFACTURED IN ACCORDANCE WITH CSA A23.4
- STEEL PRODUCTS MANUFACTURED UNDER CSA W47.1
IN ACCORDANCE WITH CSA W59
- MIN CONCRETE STRENGTH AT 28 DAYS: 35 MPA
- GRADE 400 REBAR REINFORCEMENT
- DESIGNED FOR BCL625 H20 OCCASIONAL LOADING

WWW.FRASERWAYPREKAST.COM

(604) 534-2911



TITLE

1.5M HATCH LID WITH STEEL
 BOLT DOWN PANELS - GALVANIZED
 (OR PAINTED BLACK)

SIZE
 A

SHOP DRAWING

1.5M HL BD

16595 (16601)

REV

SHEET

1/1