



AVAILABLE LID OPTIONS:
 BLVD (OFF ROAD) GALVANIZED
 WITH PADLOCK RECESS (SHOWN),
 WITH BOLTDOWN,
 PAINTED WITH BOLTDOWN,
 WITH REMOTE READER HOLES,
 WELD MARKINGS (E.G. "ELEC", "COMM")

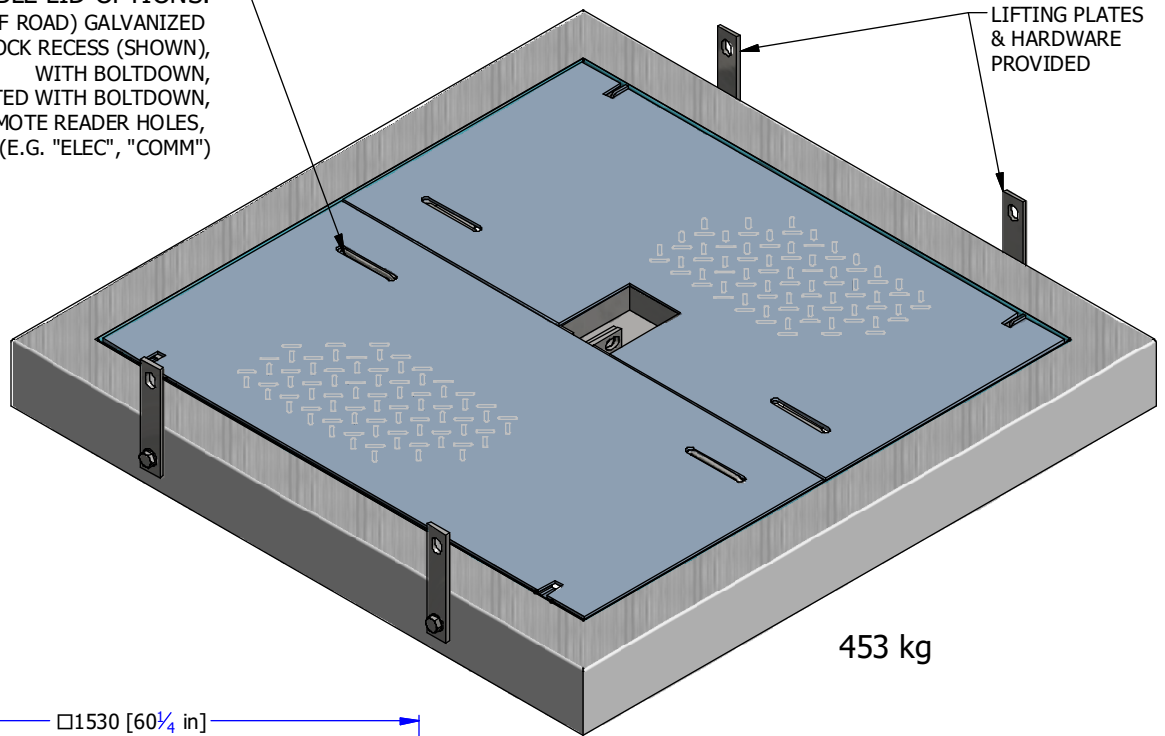

LIFTING PLATES
 & HARDWARE
 PROVIDED

453 kg

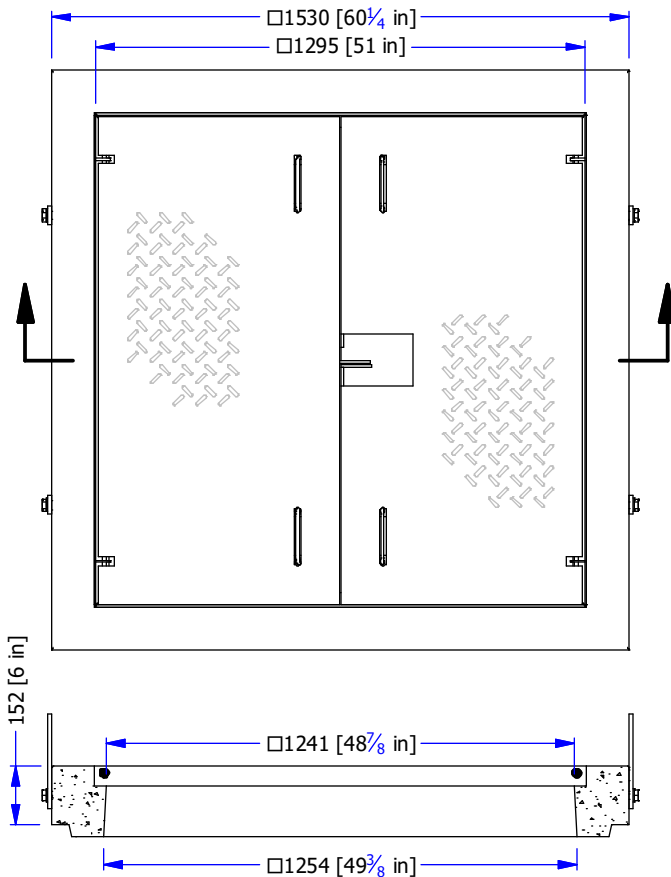

NOTES

- PRODUCT MANUFACTURED IN ACCORDANCE WITH CSA A23.4
- STEEL PRODUCTS MANUFACTURED UNDER CSA W47.1
- IN ACCORDANCE WITH CSA W59
- MIN CONCRETE STRENGTH AT 28 DAYS: 35 MPA
- GRADE 400 REBAR REINFORCEMENT
- DESIGNED FOR BCL625 H20 OCCASIONAL LOADING

WWW.FRASERWAYPREKAST.COM

(604) 534-2911



TITLE

1.5M HATCH LID WITH RECESSED PADLOCK

SIZE SHOP DRAWING
 A 1.5M HL PL

16598

REV

SHEET
 1/1