



671 kg

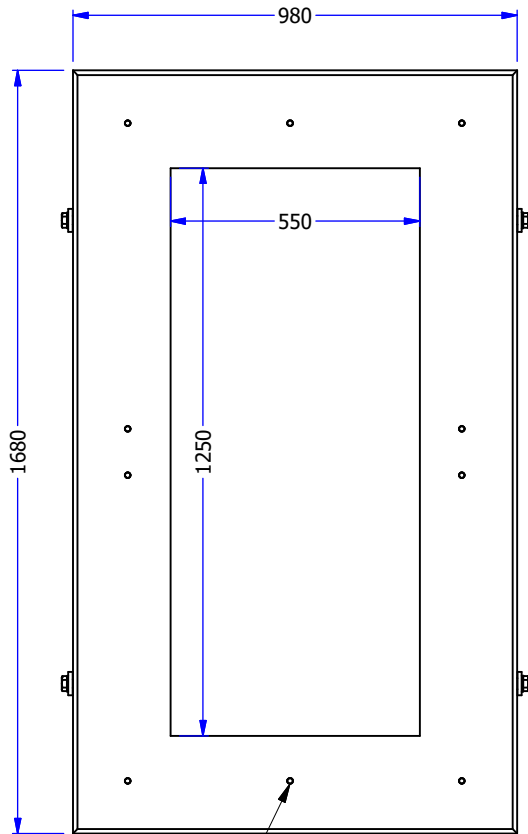

THREADED INSERTS
1/2-13unc (10x)

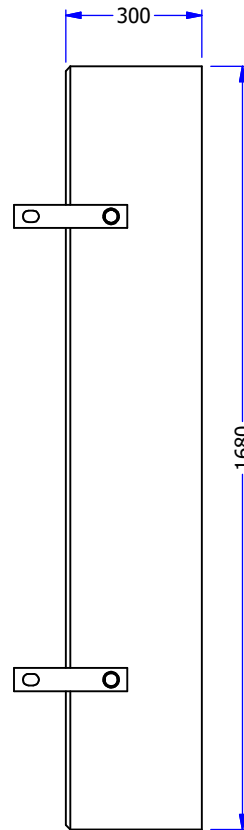

NOTES

- PRODUCT MANUFACTURED IN ACCORDANCE WITH CSA A23.4
- MINIMUM CONCRETE STRENGTH AT 28 DAYS: 32 MPA
- GRADE 400 REBAR
- STEEL TROWEL FINISH

WWW.FRASERWAYPRECAST.COM

(604) 534-2911



SHAW 6060 PEDESTAL PAD
1680 x 980 x 300

SIZE
A

DRAWING #

15054

REV

SHEET

6060 PAD

1/1