

FINISH

- [AN] ANTI-SLIP NOSING METAL/RUBBER INSERTS
- [AB] ANTI-SLIP GROOVED & BRUSHED (shown)
- [AS] ANTI-SLIP GROOVED & STEEL TROWEL
- [EA] EXPOSED AGGEGRATE (5 SIDES)
- [ST] STEEL TROWEL SMOOTH FINISH
- [] BRUSHED & EDGED (DEFAULT - BLANK)

MOUNTING


- [] ANGLE BRACKETS w/ HARDWARE (BLANK - DEFAULT)
- [NI] NO INSERTS OR MOUNTING ANGLE BRACKETS
- [NB] THREADED INSERTS ONLY NO MOUNTING ANGLE BRACKETS

- PRODUCT MANUFACTURED IN ACCORDANCE WITH CSA A23.4
- MINIMUM CONCRETE STRENGTH AT 28 DAYS: 35 MPA
- GRADE 400 REBAR REINFORCEMENT

NAMING CONVENTION FOR RECTILINEAR STAIR TREADS

(Example: RST 11x3½ x48)

(Example: RST 12½x3 x60 EA NI)

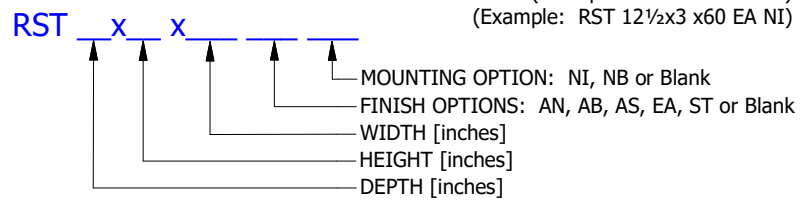

WWW.FRASERWAYPREKAST.COM (604) 534-2911



FRASERWAY PREKAST LTD
A BMGROUP COMPANY

RECTANGULAR STAIR TREAD

SIZE	DRAWING #	REV	SHEET
A	RST <u> </u> <u> </u> <u> </u> <u> </u> <u> </u>		1/1