

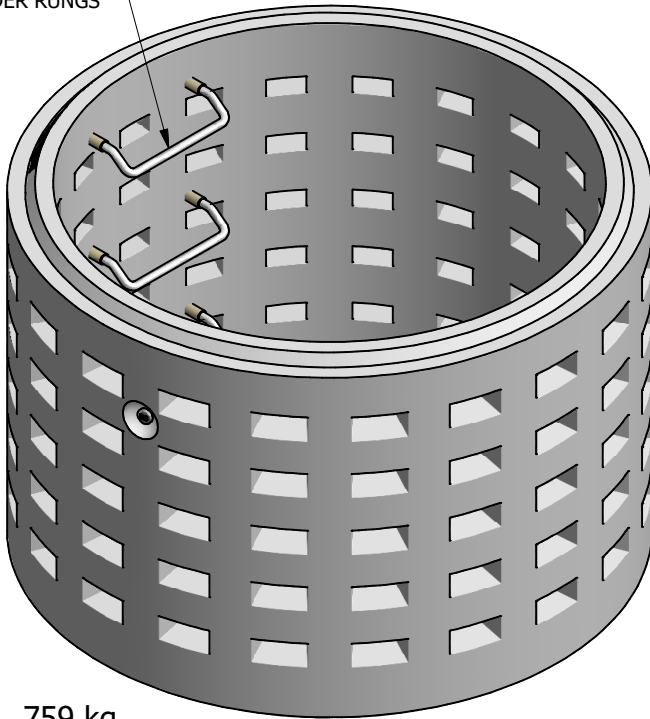


OPTIONAL:
LADDER RUNGS

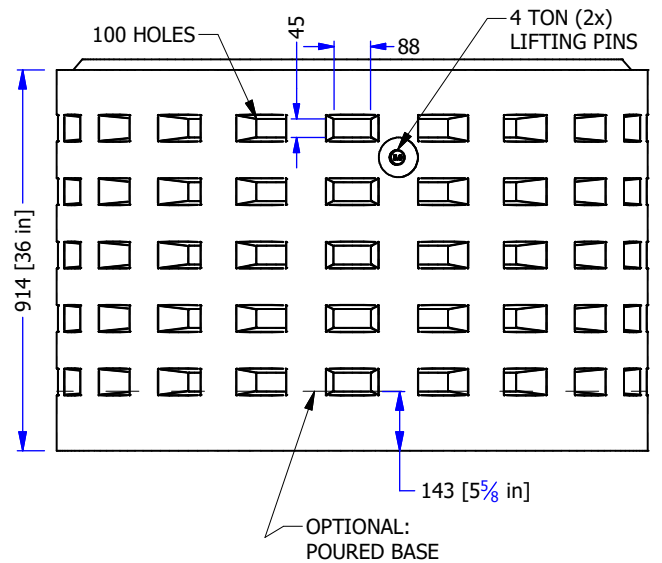

759 kg

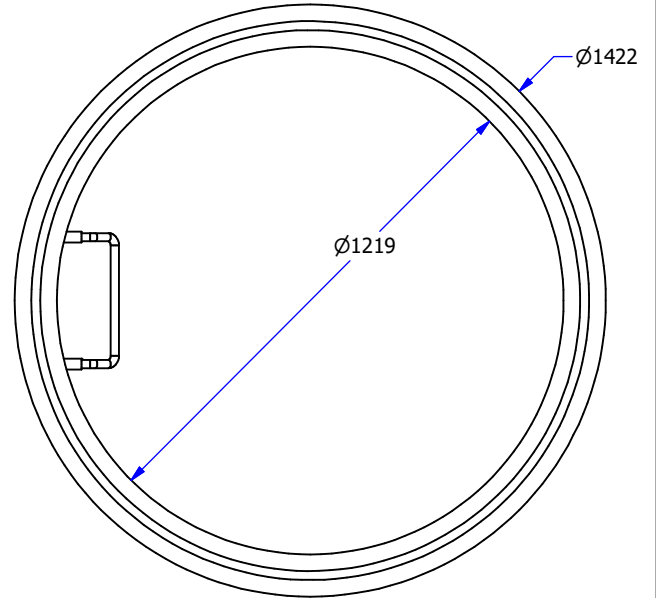

- PRODUCT TO BE MANUFACTURED IN ACCORDANCE WITH CSA A23.4
- MINIMUM CONCRETE STRENGTH AT 28 DAYS: 32 MPA
- REINFORCED WITH GRADE 400 REBAR
- WWM IN ACCORDANCE TO ASTM A1064
- HARD STEEL FINISH

WWW.FRASERWAYPREKAST.COM

(604) 534-2911



FRASERWAY PREKAST LTD
A BMGROUP COMPANY

DRYWELL Ø1200 [48"] x 900 [36"] RISER 100 HOLE PERFORATED

SIZE
A

DRAWING #

12859

REV

SHEET

DW1200x.9

1/1