




SCALE 1:25

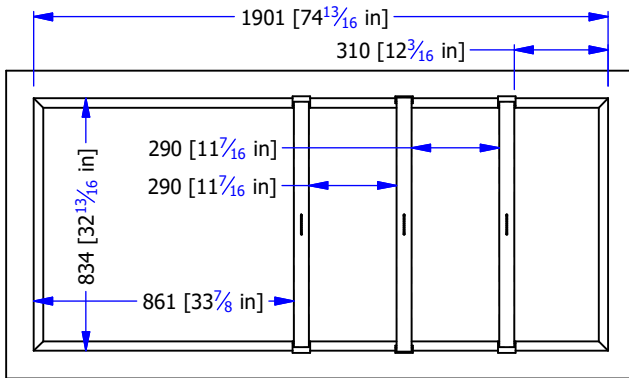

WITHOUT LID

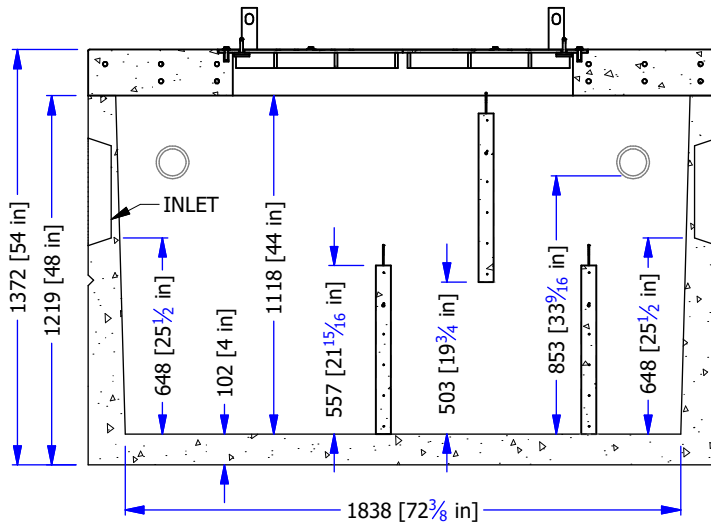

#	DESCRIPTION	ITEM #	KG
5	OI 250G LID TYPE 3 KIT w/ BOLTDOWN		92
4	OI 250G HATCH COLLAR w/ BOLTDOWN	16436	527
3	OI 250G BAFFLE #2		53
2	OI 250G BAFFLE #1		51
1	OI 250G (1140 l) BASE	16418	2075

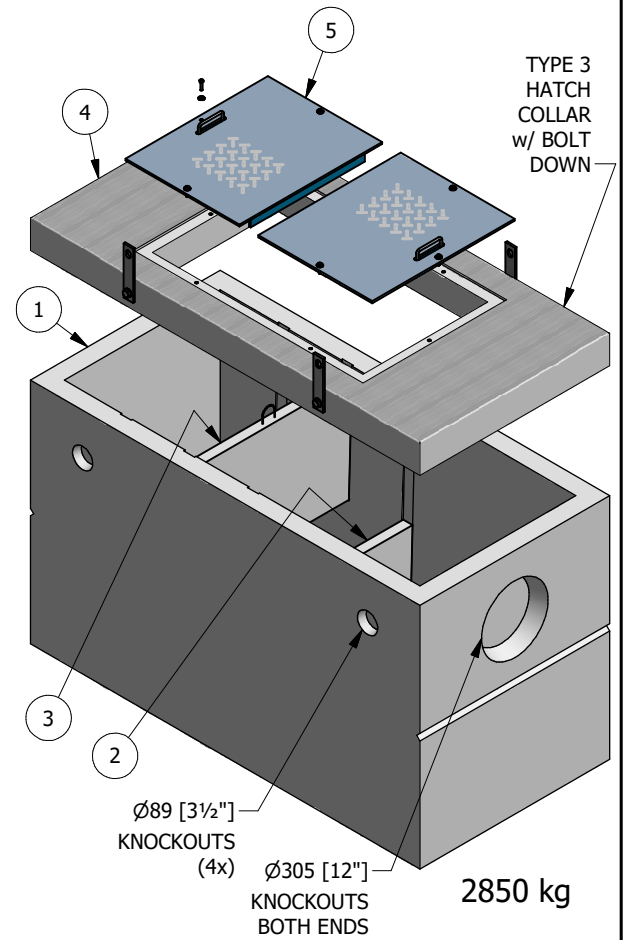

Ø89 [3 1/2"]  
KNOCKOUTS  
(4x)  
Ø305 [12"]  
KNOCKOUTS  
BOTH ENDS

2850 kg

- MANUFACTURED IN ACCORDANCE WITH CSA 23.4
- CONCRETE STRENGTH @ 28 DAYS: 35 MPA MIN.
- H 20 LOAD RATED
- REBAR: GRADE 400
- GASKET: CONSEAL CS-102
- MAXIMUM FLOW RATE: 105 LPM
- RETENTION TIME: 10 MINUTES
- TEMP OPERATING RANGE: 40 - 80°F / 4-27°C.
- BOUYANCY: 2957 kg
- SPECIFIC GRAVITY: OIL - 0.71 - 0.92  
FRESH WATER - 1.00 - 1.03

WWW.FRASERWAYPREKAST.COM

(604) 534-2911



## OIL INTERCEPTOR 250 IGAL (1140 l) HATCH COLLAR w/ 2 PANEL BOLT DOWN LID

SIZE A DRAWING #

OI 250G HL BD

REV SHEET 1/1