#	DESCRIPTION	ITEM #	KG
6	CAST IRON COVER TR18	17218	51
5	CAST IRON FRAME TR18	17209	61
4	OI 250G MANHOLE LID TYPE 1	16430	701
3	OI 250G BAFFLE #2		53
2	OI 250G BAFFLE #1		51
1	OI 250G (1140 l) BASE	16418	2075

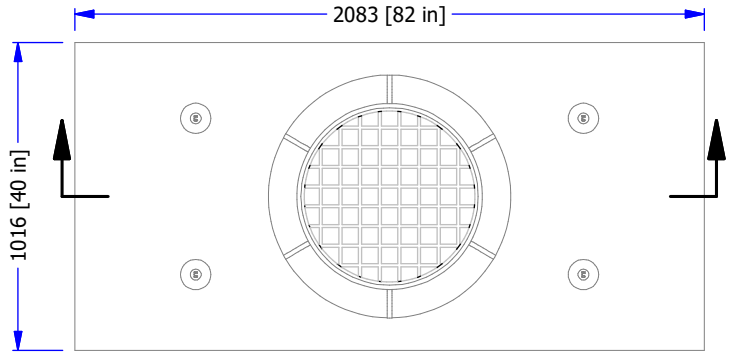

SCALE 1:25

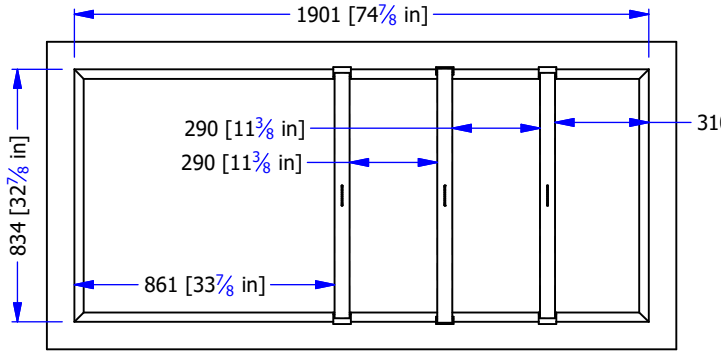

WITHOUT LID

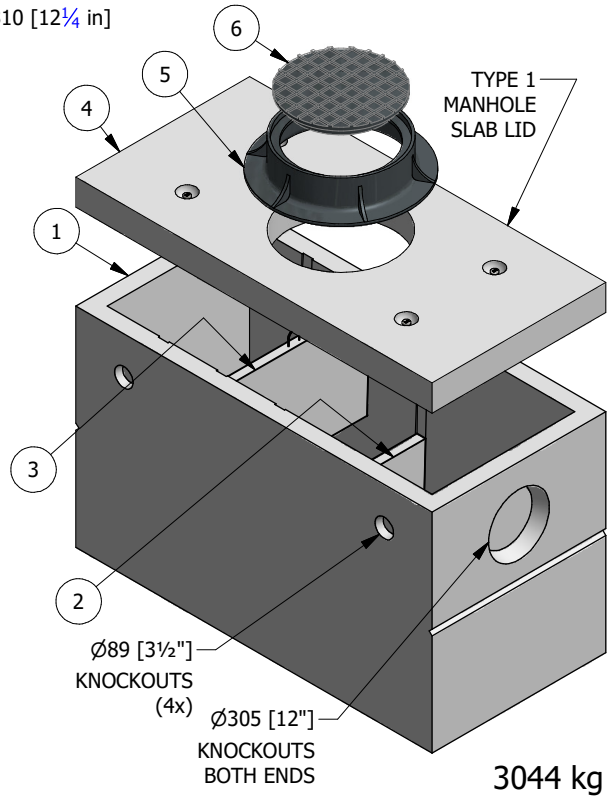

3044 kg

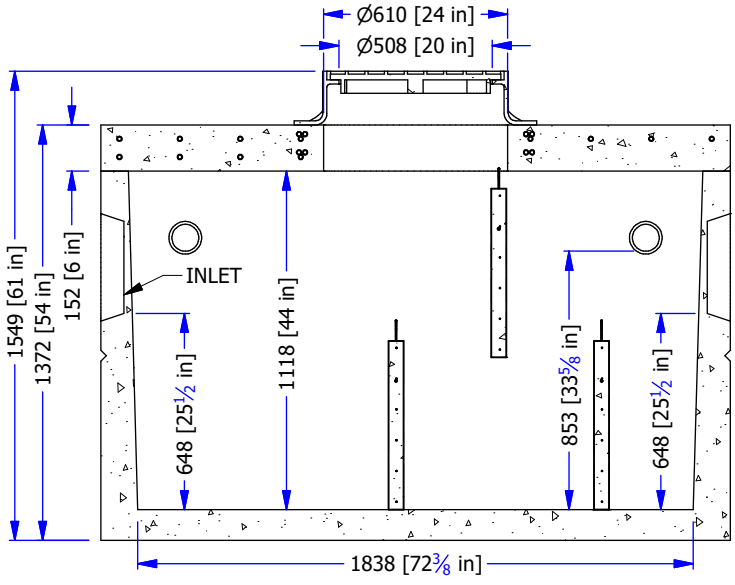

- MANUFACTURED IN ACCORDANCE WITH CSA 23.4
- CONCRETE STRENGTH @ 28 DAYS: 35 MPA MIN.
- H 20 LOAD RATED
- REBAR: GRADE 400
- GASKET: CONSEAL CS-102
- MAXIMUM FLOW RATE: 105 LPM
- RETENTION TIME: 10 MINUTES
- TEMP OPERATING RANGE: 40 - 80°F / 4-27°C.
- BOUYANCY: 2957 kg
- SPECIFIC GRAVITY: OIL - 0.71 - 0.92
  FRESH WATER - 1.00 - 1.03

WWW.FRASERWAYPREKAST.COM (604) 534-2911

FRASERWAY PREKAST LTD
A BMGROUP COMPANY

OIL INTERCEPTOR 250 IGAL (1140 l) MANHOLE SLAB LID

SIZE	DRAWING #	REV	SHEET
A	OI 250G MH		1/1