

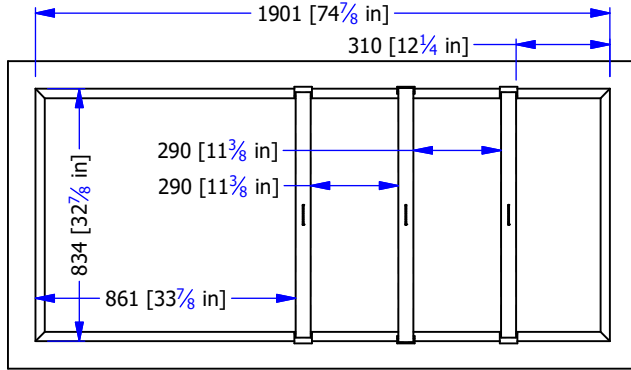


SCALE 1:25

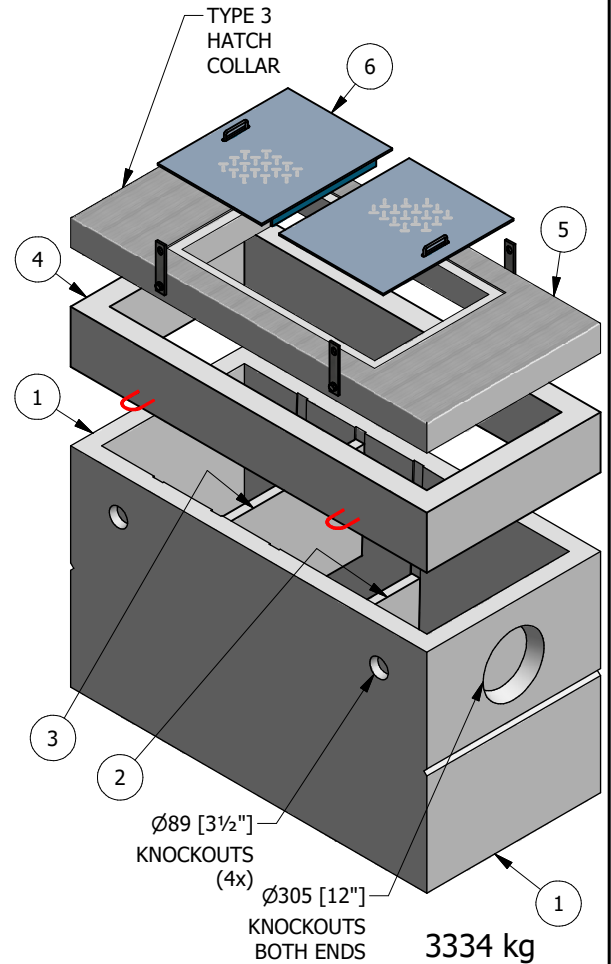

WITHOUT LID

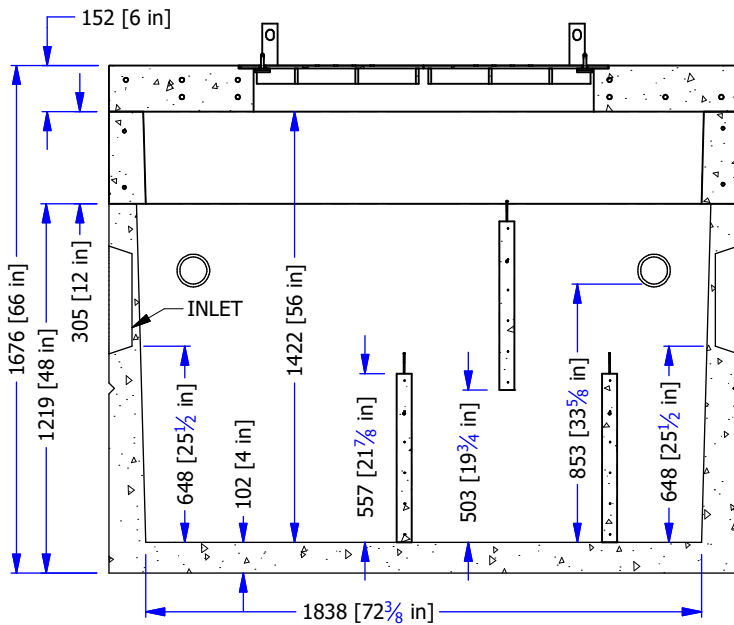

- MANUFACTURED IN ACCORDANCE WITH CSA 23.4
- CONCRETE STRENGTH @ 28 DAYS: 35 MPA MIN.
- H 20 LOAD RATED
- REBAR: GRADE 400
- GASKET: CONSEAL CS-102
- MAXIMUM FLOW RATE: 105 LPM
- RETENTION TIME: 10 MINUTES
- TEMP OPERATING RANGE: 40 - 80°F / 4-27°C.
- BOUYANCY: 2957 kg
- SPECIFIC GRAVITY: OIL - 0.71 - 0.92  
FRESH WATER - 1.00 - 1.03

WWW.FRASERWAYPREKAST.COM

(604) 534-2911



**FRASERWAY PREKAST LTD**  
A BMGROUP COMPANY

## OIL INTERCEPTOR 250 IGAL (1140 I) RISER & HATCH LID

SIZE **A** DRAWING #

OI 250G R HL

REV SHEET  
1/1