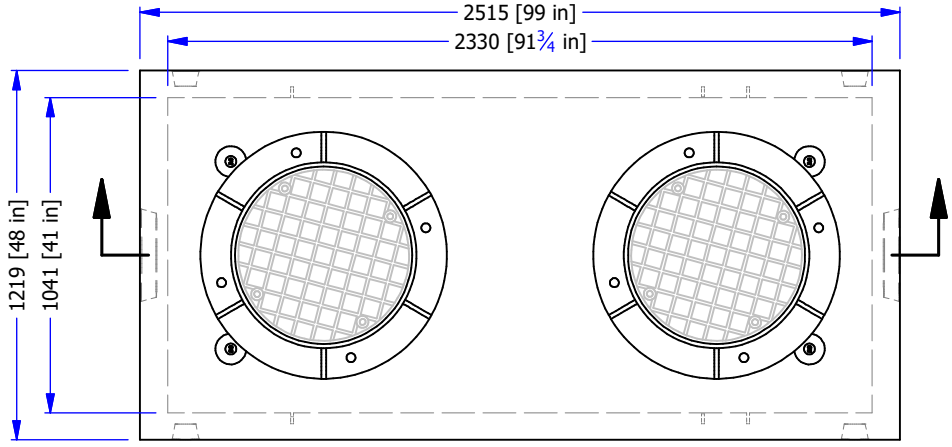

TOP VIEW

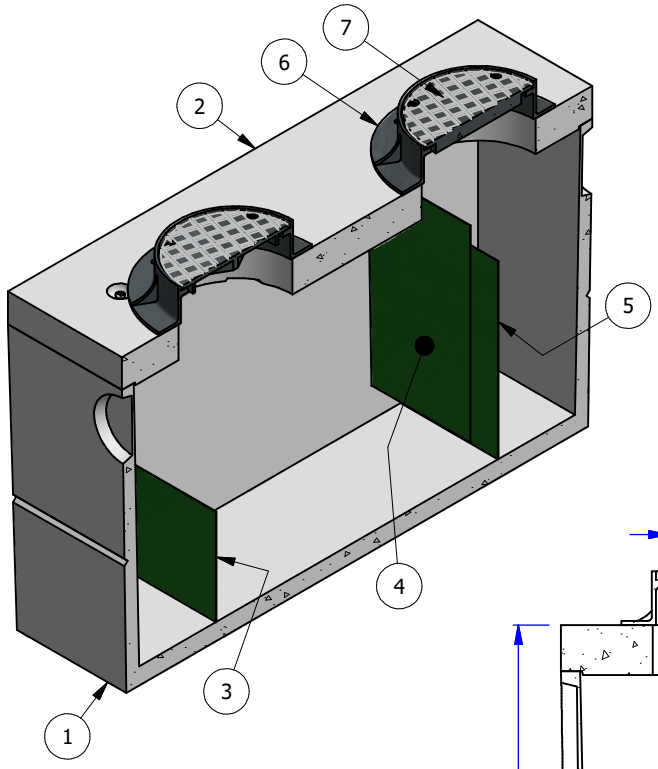

3384 kg

#	QTY	PART #	DESCRIPTION	kg
1	1	OI 600G II B	CONCRETE 3510HF	2043
2	1	OI 600G L2	OI 600G LID TYPE '2'	1026
3	1	B1 10ga	BAFFLE #1 1Oga GALV PL	15
4	1	B2 10ga	BAFFLE #2 1Oga GALV PL	30
5	1	B3 10ga	BAFFLE #3 1Oga GALV PL	27
6	2	TR18B FRAME	CAST IRON FRAME TR18B	72
7	2	TR18B COVER	CAST IRON LID TR18B	49

- MANUFACTURED IN ACCORDANCE WITH CSA 23.4
- CONCRETE STRENGTH @ 28 DAYS: 35 MPA MIN.
- H20 LOAD RATED
- REBAR: GRADE 400
- GASKET: CONSEAL CS-102
- USE IN NON-SULPHATE SOIL ONLY

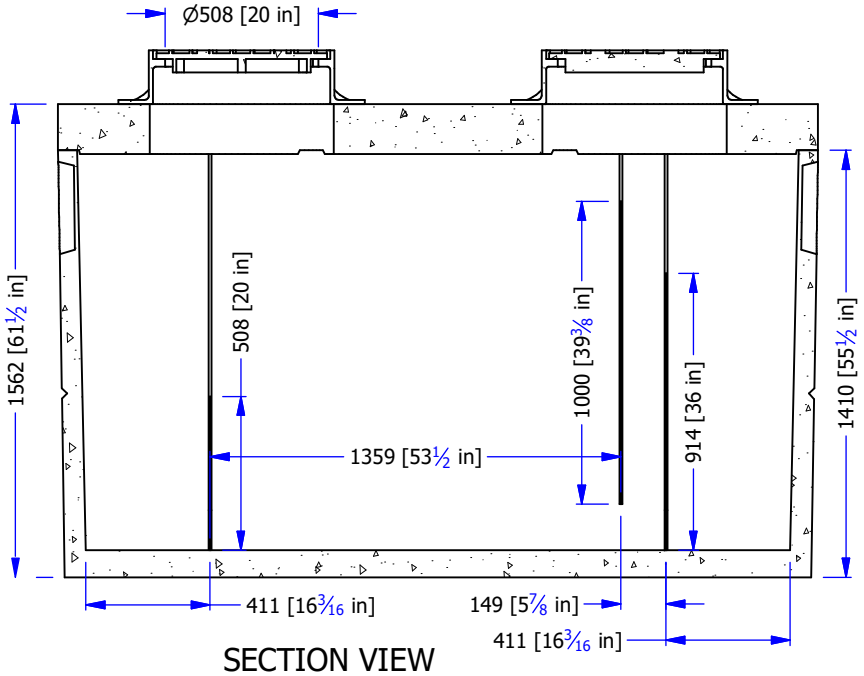

SECTION VIEW

- MAXIMUM FLOW RATE: 270 LPM
- RETENTION TIME: 10 MINUTES
- BOUYANCY: 4485 kg
- TEMP OPERATING RANGE: 40 - 80°F / 4-27°C.
- SPECIFIC GRAVITY: OIL - 0.71 - 0.92
  FRESH WATER - 1.00 - 1.03

WWW.FRASERWAYPREKAST.COM (604) 534-2911

FRASERWAY PREKAST LTD
A BMGROUP COMPANY

OIL INTERCEPTOR 600 IGAL (2730 l) API TYPE II

SIZE	DRAWING #	REV	SHEET
A	OI 600G API II		1/1