


#	QTY	PART #	DESCRIPTION	L mm	kg
1	1	OI 600G II B	CONCRETE 3510HF		2043
2	1	OI 600G L2	OI 600G LID TYPE '2'		1026
3	1	B1 10ga	BAFFLE #1 1Oga GALV PL		15
4	1	B2 10ga	BAFFLE #2 1Oga GALV PL		30
5	1	B3 10ga	BAFFLE #3 1Oga GALV PL		27
6	2	PVC 6 TEE	PVC 6" TEE		2
7	1	RPVC 6 PI	RPVC PIPE 6" (BY OTHERS)	572	3
8	1	RPVC 6 PI	RPVC PIPE 6" (BY OTHERS)	699	4
9	2	RPVC 6 PI	RPVC PIPE 6" (BY OTHERS)	152	1
10	2	TR18B FRAME	CAST IRON FRAME TR18B		72
11	2	TR18B COVER	CAST IRON LID TR18B		49

3397 kg

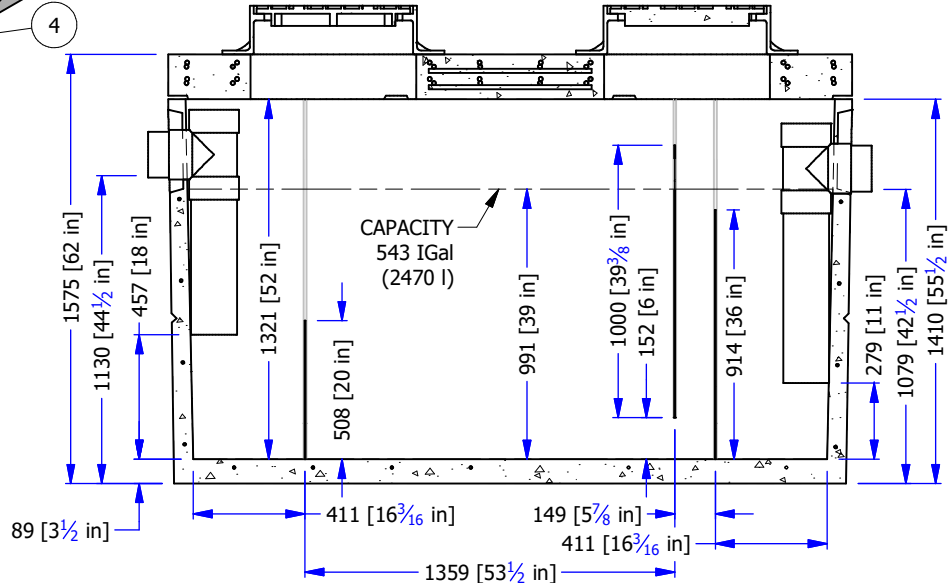

- MAXIMUM FLOW RATE: 270 LPM
- RETENTION TIME: 10 MINUTES
- BOUYANCY: 4485 kg
- TEMP OPERATING RANGE: 40 - 80°F / 4-27°C.
- SPECIFIC GRAVITY: OIL - 0.71 - 0.92  
FRESH WATER - 1.00 - 1.03

- MANUFACTURED IN ACCORDANCE WITH CSA 23.4
- CONCRETE STRENGTH @ 28 DAYS: 35 MPA MIN.
- H2O LOAD RATED
- REBAR: GRADE 400
- GASKET: CONSEAL CS-102
- USE IN NON-SULPHATE SOIL ONLY

WWW.FRASERWAYPREKAST.COM

(604) 534-2911



**FRASERWAY PREKAST LTD**  
A BMGROUP COMPANY

## OIL INTERCEPTOR 600 IGAL (2730 I) API TYPE II COALESCING PLATE 8mm SPACING w/ PIPING

SIZE  
**A**

DRAWING #

14308

REV

SHEET

**OI 600G API II P**

**1/1**